










Accessories and control

Centralised controls. Connection with general equipment connection

 <p>Serial parallel device controlling outdoor units, up to 4 units.</p> <p>----- CZ-CAPDC2*</p>	 <p>Adaptor for ON/OFF control of external devices.</p> <p>----- CZ-CAPC3</p>	 <p>Mini series parallel device controlling indoor units, maximum 1 group and 8 indoor unit.</p> <p>----- CZ-CAPBC2*</p>	 <p>Communication Adaptor. Up to 128 groups. Controls 128 units.</p> <p>----- CZ-CFUNC2</p>
--	---	---	---

Individual controls

 <p>CONEX wired remote controller (non-wireless).</p> <p>----- CZ-RTC6</p>	 <p>CONEX wired remote controller with Bluetooth®.</p> <p>----- CZ-RTC6BL</p>	 <p>CONEX wired remote controller with Wi-Fi and Bluetooth®.</p> <p>----- CZ-RTC6BLW**</p>
 <p>Design wired remote controller with Econavi function and datanavi.</p> <p>----- CZ-RTC5B</p>	 <p>Infrared remote controller for 4 way 90x90 cassette.</p> <p>----- CZ-RWS3 + CZ-RWRU3W 0000 €</p>	 <p>Infrared remote controller for 4 way 60x60 cassette PY3 with panel.</p> <p>----- CZ-RWS3 + CZ-RWRY3 0000 €</p>
 <p>Infrared remote controller for wall-mounted and 4 way 60x60 cassette with panel.</p> <p>----- CZ-RWS3 0000 €</p>	 <p>Infrared remote controller for ceiling.</p> <p>----- CZ-RWS3 + CZ-RWRT3 0000 €</p>	 <p>Infrared remote controller for all indoor units.</p> <p>----- CZ-RWS3 + CZ-RWRC3 0000 €</p>

Accessories and control



Cover frame. Silver.

FAS-00

Cover frame. White.

FAS-01

Cover frame. Glossy translucent white.

FAS-03

Cover frame. Light tan wood.

FAS-05

Cover frame. Dark brown wood.

FAS-06


Cover frame. Dark black wood.

FAS-07

Cover frame. Brushed steel finish.

FAS-10

Controller and touch controllers for hotels with dry contacts




Modbus RS-485 touch room controller with I/O, White.

PAW-RE2C4-MOD-WH

Touch display control with 2 digital inputs, White.

PAW-RE2D4-WH



Modbus RS-485 touch room controller with I/O, Black.

PAW-RE2C4-MOD-BK

Touch display control with 2 digital inputs, Black.

PAW-RE2D4-BK

Hotel sensors for dry contacts



Wall motion sensor 24 V.

PAW-WMS-DC

Wall motion sensor 240 V AC.

PAW-WMS-AC



Ceiling motion sensor 24 V.

PAW-CMS-DC

Ceiling motion sensor 240 V AC.

PAW-CMS-AC



Power supply 24 V.


PAW-24DC



Door or window contact.


PAW-DWC

Centralised controls



System controller for 64 indoor units with weekly timer.

CZ-64ESMC3



Central ON/OFF controller, up to 16 groups, 64 indoor units.

CZ-ANC3



Intelligent controller (touch screen/web server) to control up to 256 indoors with included load distribution ratio (LDR).

CZ-256ESMC3

Panasonic AC Smart Cloud



Panasonic AC Smart Cloud. Cloud internet control. Up to 128 groups. Controls 128 units.

CZ-CFUSCC1

Accessories interfaces



Modbus RTU & TCP interface for 16 indoors.

PAW-AC2-MBS-16P

Modbus RTU & TCP interface for 64 indoors.

PAW-AC2-MBS-64P

Modbus TCP interface for 128 indoors.

PAW-AC2-MBS-128P



KNX interface for 16 indoors.

PAW-AC2-KNX-16P

KNX interface for 64 indoors.

PAW-AC2-KNX-64P



BACnet IP & MSTP interface for 16 indoors.

PAW-AC2-BAC-16P

BACnet IP & MSTP interface for 64 indoors.

PAW-AC2-BAC-64P

BACnet IP interface for 128 indoors.

PAW-AC2-BAC-128P



Commercial Wi-Fi Adaptor.

CZ-CAPWFC1



KNX interface.

PAW-RC2-KNX-1i



Modbus RTU interface.

PAW-RC2-MBS-1




Modbus RTU interface to control 4 indoor/groups.

PAW-RC2-MBS-4



BACnet IP & MSTP.

PAW-RC2-BAC-1



Wi-Fi adapter for smart control via Panasonic Comfort Cloud App (for TKEA units).


CZ-TACG1



RAC interface adapter for integration into P-Link, plus external input and alarm/status output (for TKEA units).

CZ-CAPRA1

Accessories PCB

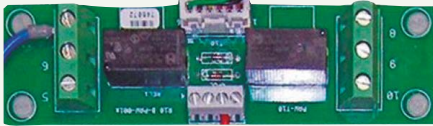

T10 interface PCB with digital and relay connections.

PAW-T10



PCB for server room application, control of 3 PACi units, redundancy, backup, etc.


PAW-PACR3



Redundancy of 2 units TKEA.

PAW-SERVER-PKEA

Accessories cables



Cable for all the T10 functions.

CZ-T10



Cable to operate external EC fan.

PAW-FDC



Cable for all option monitoring signals.

PAW-OCT

Cable with force thermo OFF/leakage detection.

PAW-EXCT

PRO-HT Tank accessories

Tank controller for PACi system.

PAW-VP-RTC5B-PAC

Additional heater.

PAW-IU29/39

* Not compatible with PACi NX Series.
 ** Only compatible with PACi NX Series.